

ROLLCHECK®

LASER ROLL ALIGNMENT SYSTEM

BY SEIFFERT INDUSTRIAL


ROLLCHECK®

- Reduces down time and product waste due to misalignment of rolls
- Increases production with proper alignment of rolls
- Compact design, fits into small spaces
- FAST and EASY to use
- No training required
- One-person operation
- Facilitates more frequent roll checks
- Pays for itself quickly
- Uses proven reflected laser beam technology
- Used for shots up to 10 ft.

SEIFFERT INDUSTRIAL

1323 Columbia Drive, Suite 305
Richardson, Texas 75081 USA

800-856-0129 Toll Free
972-671-9465 Phone
972-671-9468 Fax
info@seiffertindustrial.com

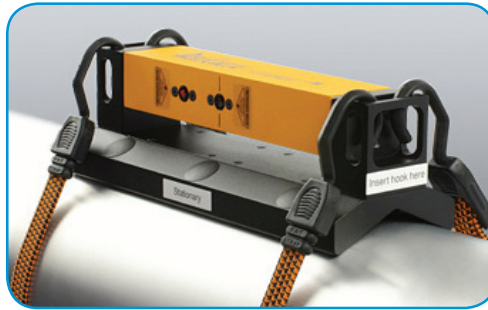

LASER ALIGNMENT TOOL FOR ACCURATE VISUAL ALIGNMENT OF ROLLS


Patented Reflected Laser Beam Technology

The RollCheck® laser alignment system for parallel roll alignment is lightweight, compact and durable. The system can be magnetically attached to just about any size roll or attached with the supplied straps. We use our proven reflected laser beam technology for maximum angular resolution, thus providing you with the most reliable and accurate visual reading.

The RollCheck® can measure spans up to 10 feet from roll to roll of any size, large or small. A laser line is projected from the RollCheck® transmitter to the reflector mounted on the roll to be checked or aligned. The laser line projected to the reference line on the reflector indicates immediately if the roll is aligned vertically to the stationary roll. The laser line is then automatically reflected back to the transmitter's reference line indicating if the rolls are parallel to one another. This system is very easy to use; a single person can perform the alignment task in minutes with no training! The RollCheck® comes in its own durable carrying case.

Rolls are aligned vertically ...

- When horizontal line coincides with the horizontal groove on the reflector unit.



Rolls are parallel ...

- When vertical reflected line coincides with the vertical groove on the laser transmitter unit.




www.seiffertindustrial.com

Parallel Roll Alignment, utilizing the RollCheck® Laser Roll Alignment System to measure and correct vertical and horizontal angle between 2 rolls.

RollCheck® is a laser roll alignment system that facilitates accurate visual alignment of process rolls during replacement operations. The Laser Transmitter is mounted to a stationary roll that transmits two red laser lines to the Reflector positioned on the roll to be moved. The operator then is able to view both the vertical (pitch) and horizontal (parallel) angles and accurately adjust the roll into parallel alignment. RollCheck® is suitable for aligning rolls of most diameters that are spaced from 6 inches to 10 feet apart. It also can be used to align and measure crowned rolls as well.

RollCheck® eliminates cumbersome trial and error adjustments which lead to scrap, loss of time and output reduction and is the ideal tool for efficient roll maintenance.

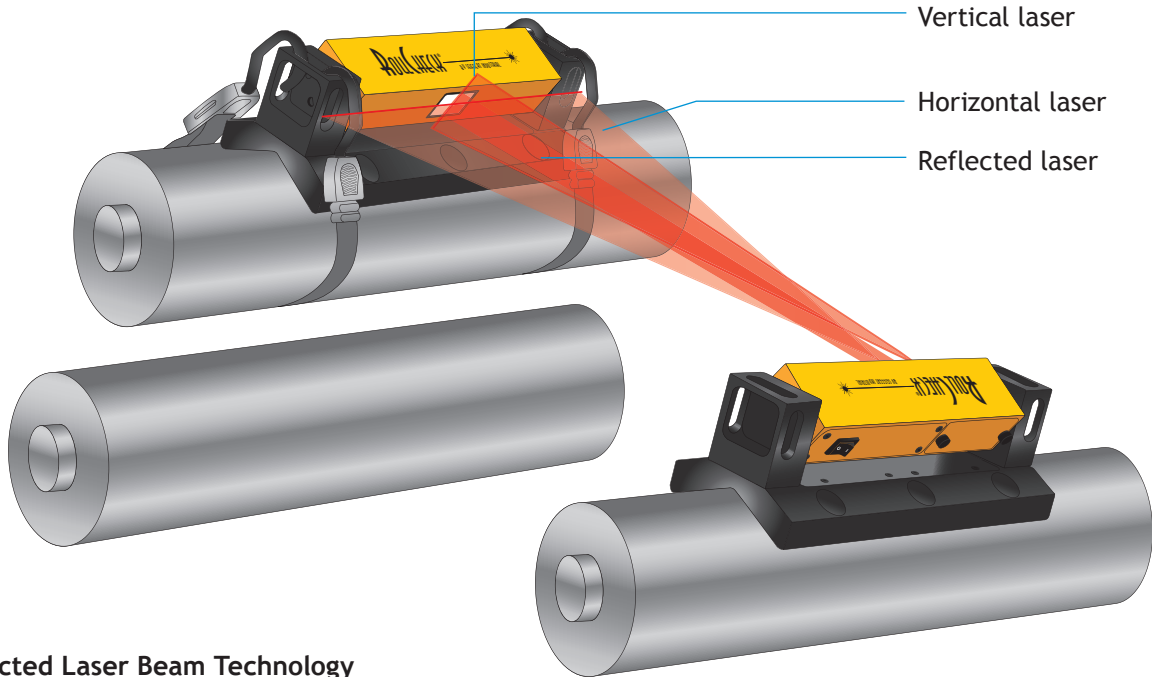

Patented Reflected Laser Beam Technology

Simply match the red laser lines with the black reference lines on the RollCheck®. You will see the results in seconds.

Examples of roll misalignment

Front View



Roll to be moved (RTBM) is not on the same horizontal plane as the stationary roll.

Top View



Reflected laser line shows the roll is not parallel-left.




Reflected laser line shows the roll is not parallel-right.

Examples of rolls that are in alignment

Front View



Roll to be moved (RTBM) is on the same plane as the stationary roll.



Reflected line shows the rolls are parallel to one another.

TECHNICAL DATA: ROLLCHECK®



Transmitter Model SX-5100T

- Operating distance: Max. 10 ft.
- Accuracy: < 0.001"/ft.
- Laser type: 2 ea. 635nm visible red laser lines, 15° full angle
- Laser power: < 1mW, Class 2
- Safety precautions: Do not stare into beam
- Laser compliance: CFR parts 1040.10 and 1040.11
- Laser line thickness: 0.017" at 9 ft.
- Laser calibration: Factory calibrated, check yearly
- Environmental protection: Water resistant, dust proof and impact resistant
- Controls: Laser ON/OFF rocker switch
- Battery type: 4 "AA" alkaline batteries
- Operating time: 25 - 30 hours continuous at 72°F
- Temperature: Operating: 15° to 125°F
Storage: -4° to 140°F
- Frame: Rigid aluminum frame, pinned and bolted, powder-coat paint finish
- Laser housing: Aluminum, powder-coat paint finish
- Mounting diameters: Diameters up to 8 ft.
- Mounting straps: Set of 2 attachment straps included: 2 ea. 10" to 45" adjustable bungee straps for diameters up to 15"
2 ea. 10 ft. adjustable straps for diameters up to 38"
- Weight: 5.25 lbs.
- Dimensions: 11" (W) x 4" (D) x 3.5" (H)



Reflector Model SX-5100R

- Reflector size: 1" x 1.4"
- Frame: Rigid aluminum frame, pinned and bolted, powder-coat paint finish
- Reflector housing: Aluminum, powder-coat paint finish
- Mounting straps: Set of 2 attachment straps included: 2 ea. 10" to 45" adjustable bungee straps for diameters up to 15"
2 ea. 10 ft. adjustable straps for diameters up to 38"
- Weight: 5 lbs.
- Dimensions: 11" (W) x 4" (D) x 3.5" (H)



- Powerful magnetic brackets hold the RollCheck® firmly in place

Carrying Case

- Material: Black, high density hard polyethylene
- Dimensions: 20.5" (W) x 16.75" (D) x 8.5" (H)
- Insert: Die cut foam
- Carrying case weight: 14 lbs.
- Total system weight: 24 lbs.

